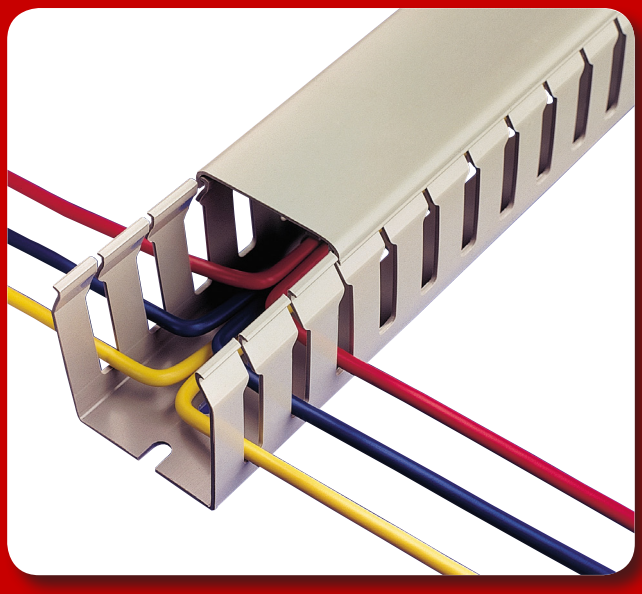

Betaduct PVC

Grey Open Slot	2
Black Open Slot	3
Blue Open Slot	4
Open Slot - Mini Packs	5
Grey Closed Slot	6
Black Closed Slot	7
Closed Slot - Mini Packs	8
Grey Narrow Slot	9
Black Narrow Slot	10
Grey Solid Wall	11
Black Solid Wall	12

DESCRIPTION

Open Slot PVC Betaduct provides a lightweight self-extinguishing cable trunking with excellent rigidity and performance characteristics. Wide fingers give additional cable support and terminated wires can be re-routed easily. Available with 20mm slot pitch, 8mm slot width in 23 sizes. Recommended fixing method; Betaduct rivets and washers.

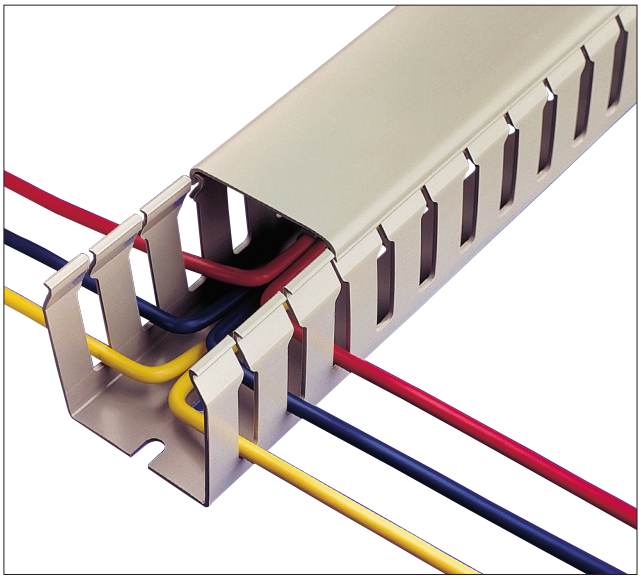

APPLICATION

For use when bundles, cables and wires need supporting in control panels, distribution boards and switchgear. Ideal for all panel building applications.

SPECIFICATION

Material: Self-extinguishing PVC

Colour Options: Grey RAL 7030

Service Temperature Range: -15˚C to +60˚C

Flammability: UL94 V-O Rated Material

Standards: Base Slots to DIN 43659. RoHS, CSA, UL and Lloyds Register Approved.

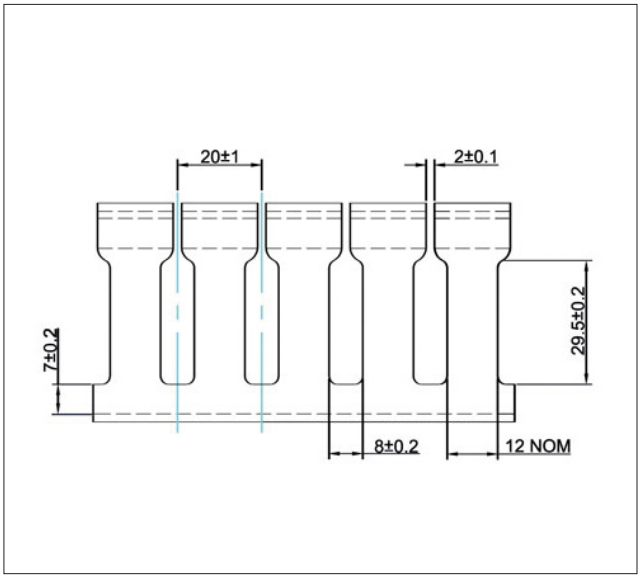

PART NUMBERS & SIZES

PART NO: GREY OPEN SLOT	NOMINAL SIZE INNER (WxH) mm	NOMINAL SIZE OUTER (WxH) mm	PACK QTY (METRES)
10450018	19 x 50	25 x 53	24
10450022	25 x 37.5	29 x 41	24
10450023	25 x 50	29 x 54	24
10450024	25 x 75	29 x 79	16
10450025	25 x 100	30 x 105	16
10450032	37.5 x 37.5	41 x 41	24
10450033	37.5 x 50	41 x 54	16
10450034	37.5 x 75	39 x 79	16
10450035	37.5 x 100	43 x 105	16
10450051	50 x 25	54 x 28	24
10450052	50 x 37.5	54 x 41	16
10450053	50 x 50	54 x 54	16
10450054	50 x 75	55 x 79	16
10450055	50 x 100	56 x 105	8
10450072	75 x 37.5	80 x 41	16
10450073	75 x 50	78 x 54	16
10450074	75 x 75	80 x 80	16
10450075	75 x 100	80 x 105	8
10450103	100 x 50	107 x 54	8
10450104	100 x 75	107 x 80	8
10450105	100 x 100	107 x 104	8
10450106	100 x 125	107 x 130	8
10450124	125 x 75	131 x 78	8

DESCRIPTION

Open Slot PVC Betaduct provides a lightweight self-extinguishing cable trunking with excellent rigidity and performance characteristics. Wide fingers give additional cable support and terminated wires can be re-routed easily. Available with 20mm slot pitch, 8mm slot width in 23 sizes. Recommended fixing method; Betaduct rivets and washers.

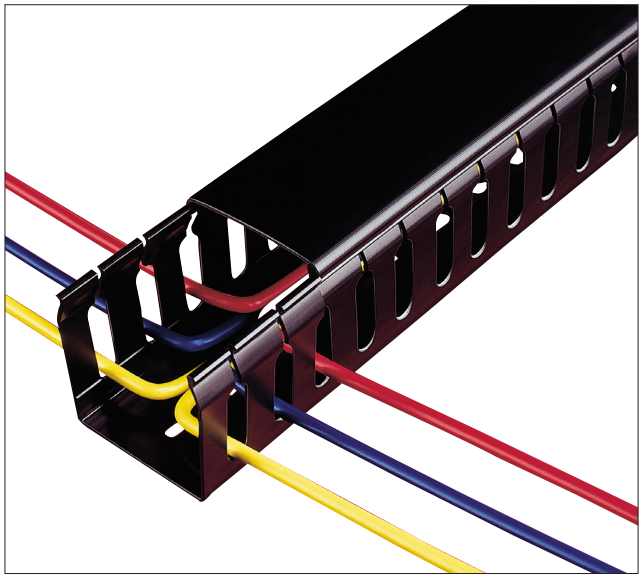

APPLICATION

For use when bundles, cables and wires need supporting in control panels, distribution boards and switchgear. Ideal for all panel building applications.

SPECIFICATION

Material: Self-extinguishing PVC

Colour Options: Black

Service Temperature Range: -15˚C to +60˚C

Flammability: UL94 V-O Rated Material

Standards: Base Slots to DIN 43659. RoHS, CSA, UL and Lloyds Register Approved.

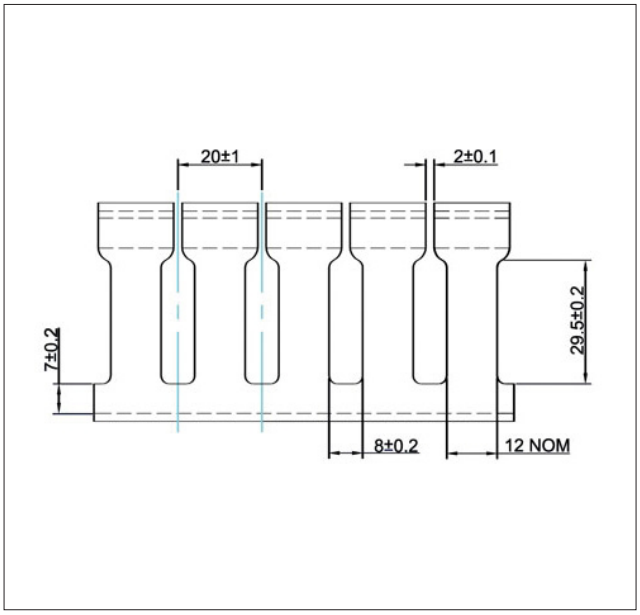

PART NUMBERS & SIZES

PART NO: BLACK OPEN SLOT	NOMINAL SIZE INNER (WxH) mm	NOMINAL SIZE OUTER (WxH) mm	PACK QTY (METRES)
0980	19 x 50	25 x 53	24
0981	25 x 37.5	29 x 41	24
0913	25 x 50	29 x 54	24
0914	25 x 75	29 x 79	16
0983	25 x 100	30 x 105	16
0984	37.5 x 37.5	41 x 41	24
0985	37.5 x 50	41 x 54	16
0986	37.5 x 75	39 x 79	16
0987	37.5 x 100	43 x 105	16
0988	50 x 25	54 x 28	24
0989	50 x 37.5	54 x 41	16
0916	50 x 50	54 x 54	16
0917	50 x 75	55 x 79	16
0992	50 x 100	56 x 105	8
0993	75 x 37.5	80 x 41	16
0994	75 x 50	78 x 54	16
0919	75 x 75	80 x 80	16
0996	75 x 100	80 x 105	8
0998	100 x 50	107 x 54	8
0999	100 x 75	107 x 80	8
1000	100 x 100	107 x 104	8
1001	100 x 125	107 x 130	8
0941	125 x 75	131 x 78	8

DESCRIPTION

Open Slot PVC Betaduct provides a lightweight self-extinguishing cable trunking with excellent rigidity and performance characteristics. Wide fingers give additional cable support and terminated wires can be re-routed easily. Available with 20mm slot pitch, 8mm slot width in 13 sizes. Recommended fixing method; Betaduct rivets and washers.

APPLICATION

For use when bundles, cables and wires need supporting in control panels, distribution boards and switchgear. Ideal for all panel building applications.

SPECIFICATION

Material: Self-extinguishing PVC

Colour Options: Blue

Service Temperature Range: -15˚C to +60˚C

Flammability: UL94 V-O Rated Material

Standards: Base Slots to DIN 43659. RoHS, CSA, UL and Lloyds Register Approved.

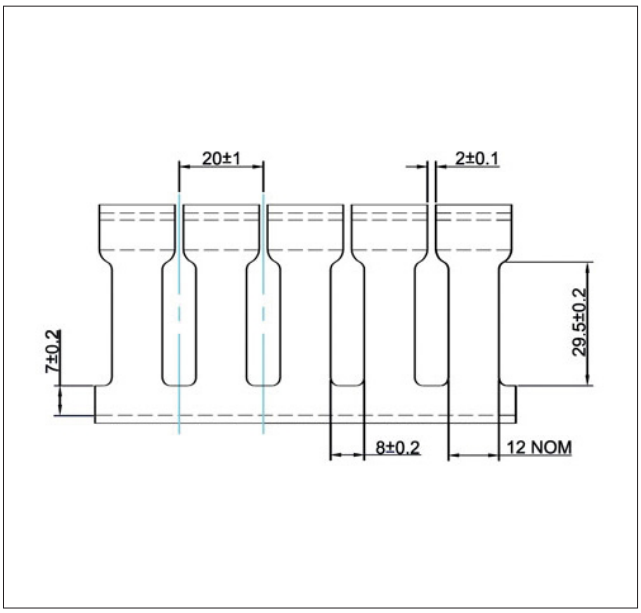

PART NUMBERS & SIZES

PART NO. BLUE OPEN SLOT	NOMINAL SIZE INNER (WxH) mm	NOMINAL SIZE OUTER (WxH) mm	PACK QTY (METRES)
09136	25 x 50	29 x 54	24
09146	25 x 75	29 x 79	16
09836	25 x 100	30 x 105	16
09856	37.5 x 50	41 x 54	16
09866	37.5 x 75	39 x 79	16
09876	37.5 x 100	37.5 x 100	16
09166	50 x 50	54 x 54	16
09176	50 x 75	55 x 79	16
09926	50 x 100	56 x 105	8
09196	75 x 75	80 x 80	16
09966	75 x 100	80 x 105	8
09996	100 x 75	107 x 80	8
1006	100 x 100	107 x 104	8

DESCRIPTION

Open Slot PVC Betaduct provides a lightweight self-extinguishing cable trunking with excellent rigidity and performance characteristics. Wide fingers give additional cable support and terminated wires can be re-routed easily. Supplied in handy mini packs containing 4 x 1 metre packs. Recommended fixing method; Betaduct rivets and washers.

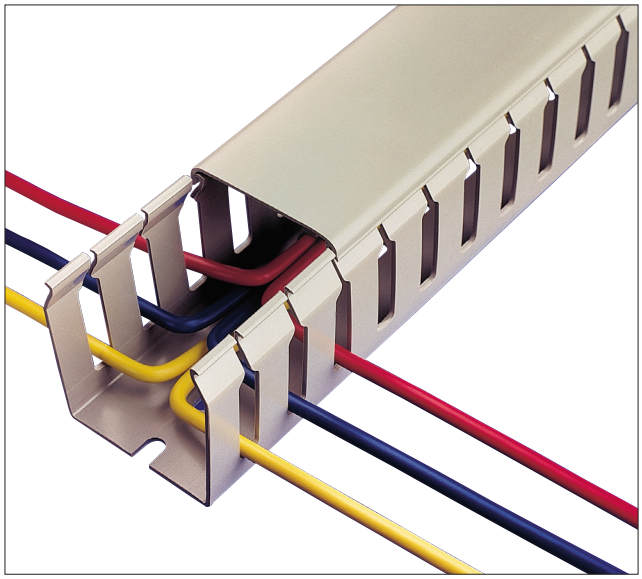

APPLICATION

For use when bundles, cables and wires need supporting in control panels, distribution boards and switchgear. Ideal for all panel building applications.

SPECIFICATION

Material: Self-extinguishing PVC

Colour Options: Grey or Black

Service Temperature Range: -15˚C to +60˚C

Flammability: UL94 V-O Rated Material

Standards: Base Slots to DIN 43659. RoHS, CSA, UL and Lloyds Register Approved.

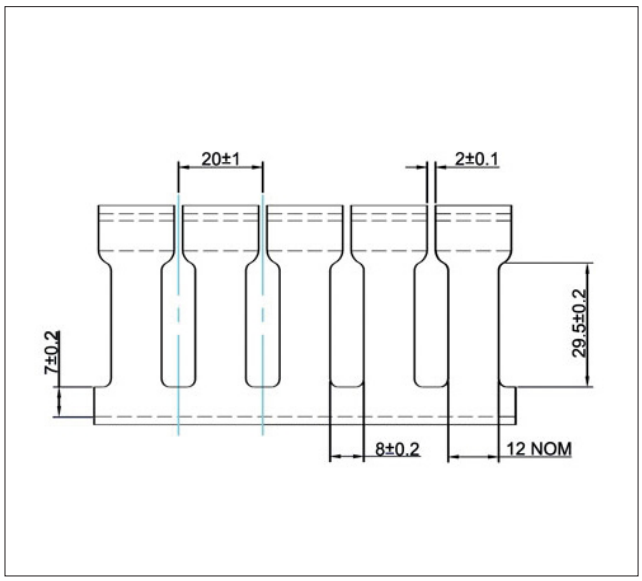

PART NUMBERS & SIZES

PART NO:	COLOUR	NOMINAL SIZE INNER (WxH) mm	NOMINAL SIZE OUTER (WxH) mm	QTY
08862000	Black	25 x 37.5	29 x 41	4 x 1m
08872000	Black	25 x 50	29 x 54	4 x 1m
08882000	Black	50 x 50	54 x 54	4 x 1m
10452022	Grey	25 x 37.5	29 x 41	4 x 1m
10452023	Grey	25 x 50	29 x 54	4 x 1m
10452051	Grey	50 x 25	54 x 28	4 x 1m
10452053	Grey	50 x 50	54 x 54	4 x 1m

DESCRIPTION

Closed slot PVC Betaduct provides a lightweight self extinguishing cable trunking with excellent rigidity and performance characteristics. It has excellent cable retention with enhanced protection for installers. It is provided in 25 sizes with 20mm slot pitching. Recommended fixing method; Betaduct rivets and washers.

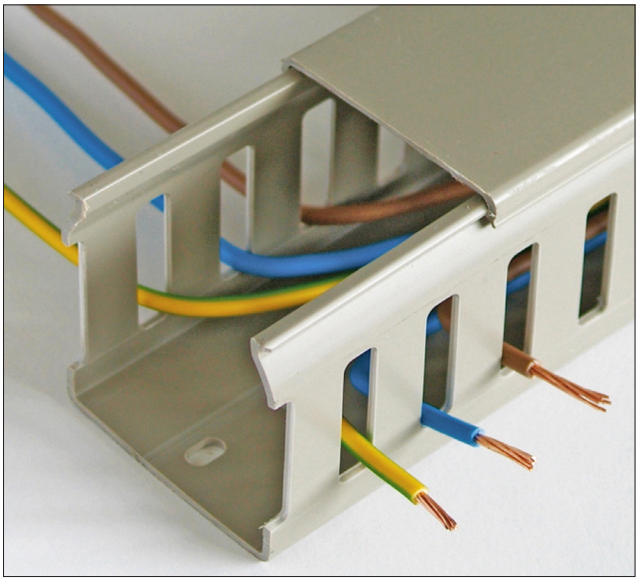

APPLICATION

For use when bundles, cables and wires need supporting in control panels, distribution boards and switchgear. Ideal for all panel building applications.

SPECIFICATION

Material: Self-extinguishing PVC

Colour Options: Grey

Service Temperature Range: -15˚C to +60˚C

Flammability: UL94 V-O Rated Material

Standards: Base Slots to DIN 43659. RoHS, CSA, UL and Lloyds Register Approved.

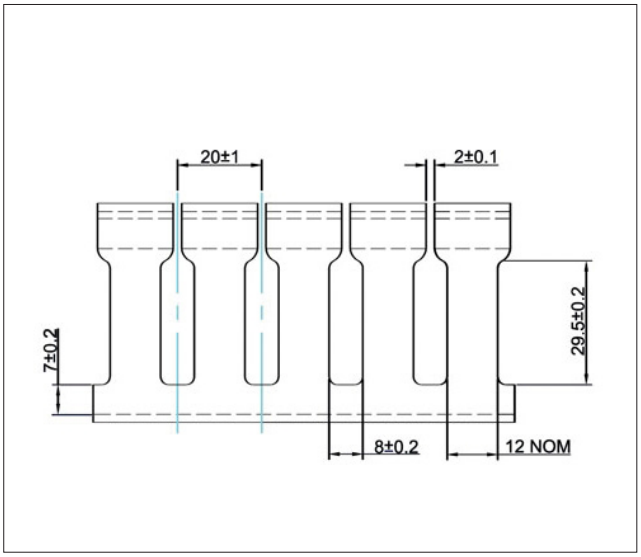

PART NUMBERS & SIZES

PART NO. GREY CLOSED SLOT	NOMINAL SIZE INNER (WxH) mm	NOMINAL SIZE OUTER (WxH) mm	PACK QTY M
10460011	15 x 15	17 x 17	48
10460018	19 x 50	25 x 53	24
10460021	25 x 20	29 x 23	24
10460022	25 x 37.5	29 x 41	24
10460023	25 x 50	29 x 54	24
10460024	25 x 75	29 x 79	16
10460025	25 x 100	30 x 105	16
10460032	37.5 x 37.5	37.5 x 37.5	24
10460033	37.5 x 50	41 x 54	16
10460034	37.5 x 75	39 x 79	16
10460035	37.5 x 100	43 x 105	16
10460051	50 x 25	54 x 28	24
10460052	50 x 37.5	54 x 41	16
10460053	50 x 50	54 x 54	16
10460054	50 x 75	55 x 79	16
10460055	50 x 100	56 x 105	8
10460072	75 x 37.5	78 x 41	16
10460073	75 x 50	78 x 54	16
10460074	75 x 75	80 x 80	16
10460075	75 x 100	80 x 105	8
10460103	100 x 50	107 x 54	8
10460104	100 x 75	107 x 80	8
10460105	100 x 100	107 x 105	8
10460106	100 x 125	107 x 130	8
10460124	125 x 75	131 x 78	8

DESCRIPTION

Closed slot PVC Betaduct provides a lightweight self extinguishing cable trunking with excellent rigidity and performance characteristics. It has excellent cable retention with enhanced protection for installers. It is provided in 23 sizes with 20mm slot pitching. Recommended fixing method; Betaduct rivets and washers.

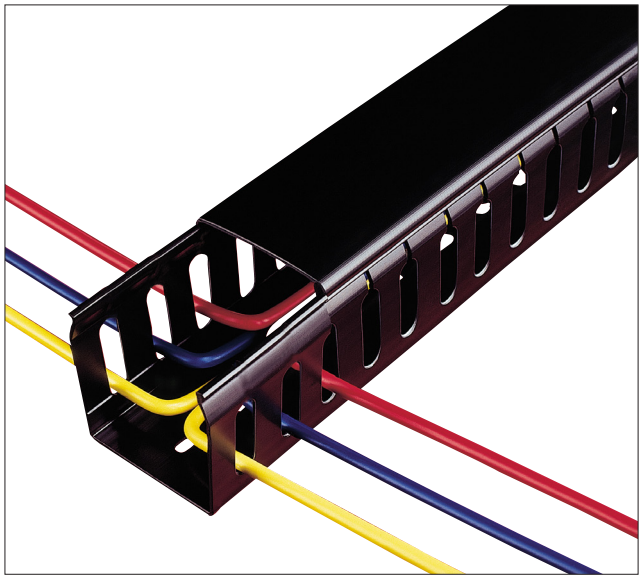

APPLICATION

For use when bundles, cables and wires need supporting in control panels, distribution boards and switchgear. Ideal for all panel building applications.

SPECIFICATION

Material: Self-extinguishing PVC

Colour Options: Black

Service Temperature Range: -15˚C to +60˚C

Flammability: UL94 V-O Rated Material

Standards: Base Slots to DIN 43659. RoHS, CSA, UL and Lloyds Register Approved.

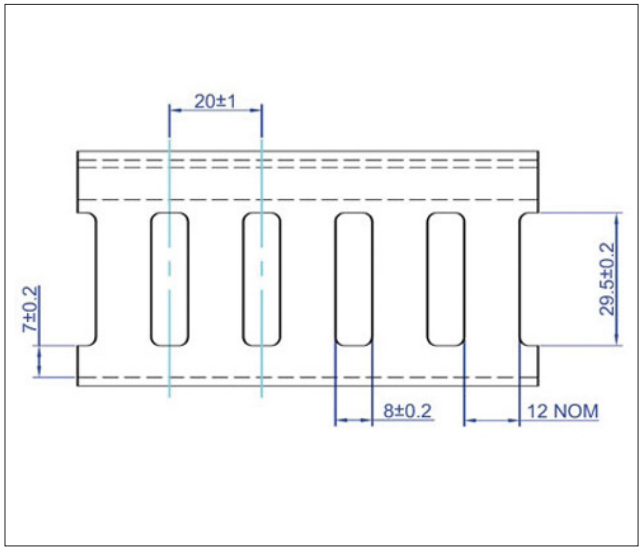

PART NUMBERS & SIZES

PART NO. BLACK CLOSE SLOT	NOMINAL SIZE INNER (WxH) mm	NOMINAL SIZE OUTER (WxH) mm	PACK QTY (METRES)
0900	15 x 15	17 x 17	48
0950	19 x 50	25 x 53	24
0901	25 x 20	29 x 23	24
0951	25 x 37.5	29 x 41	24
0903	25 x 50	29 x 54	24
0904	25 x 75	29 x 79	16
0953	25 x 100	30 x 105	16
0954	37.5 x 37.5	37.5 x 37.5	24
0955	37.5 x 50	41 x 54	16
0956	37.5 x 75	39 x 79	16
0957	37.5 x 100	43 x 105	16
0959	50 x 37.5	54 x 41	16
0906	50 x 50	54 x 54	16
0907	50 x 75	55 x 79	16
0962	50 x 100	56 x 105	8
0964	75 x 50	78 x 54	16
0909	75 x 75	80 x 80	16
0966	75 x 100	80 x 105	8
0968	100 x 50	107 x 54	8
0969	100 x 75	107 x 80	8
0970	100 x 100	107 x 105	8
0971	100 x 125	107 x 130	8
0940	125 x 75	131 x 78	8

DESCRIPTION

Closed slot PVC Betaduct provides a lightweight self extinguishing cable trunking with excellent rigidity and performance characteristics. It has excellent cable retention with enhanced protection for installers. Supplied in handy mini packs containing 4 x 1 metre packs. Recommended fixing method; Betaduct rivets and washers.

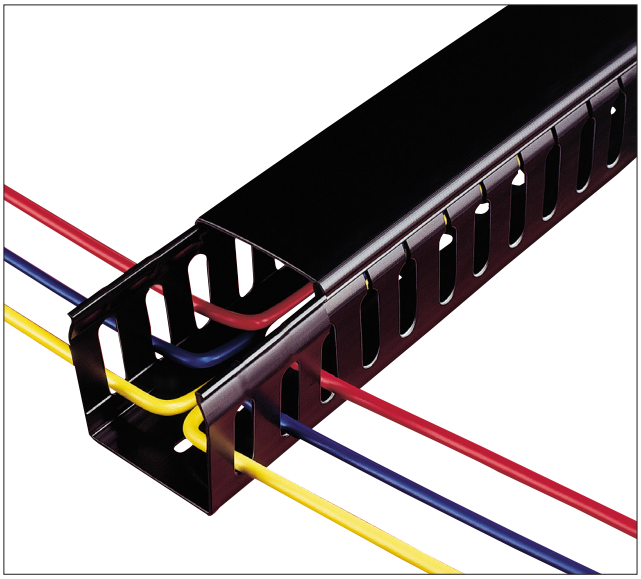

APPLICATION

For use when bundles, cables and wires need supporting in control panels, distribution boards and switchgear. Ideal for all panel building applications.

SPECIFICATION

Material: Self-extinguishing PVC

Colour Options: Grey or Black

Service Temperature Range: -15˚C to +60˚C

Flammability: UL94 V-O Rated Material

Standards: Base Slots to DIN 43659. RoHS, CSA, UL and Lloyds Register Approved.

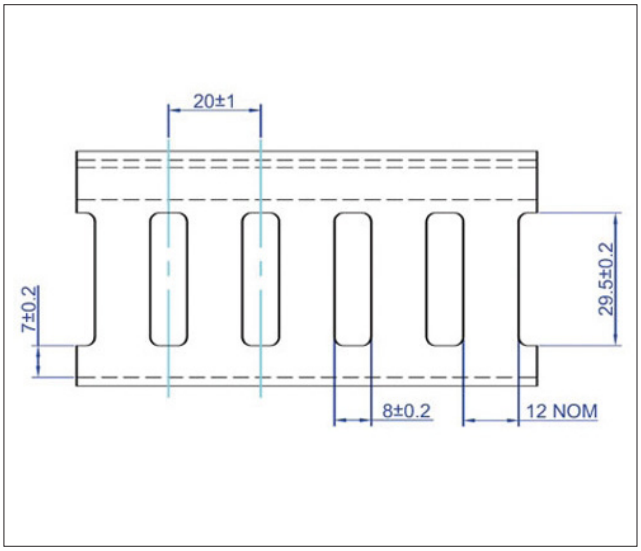

PART NUMBERS & SIZES

PART NO.	COLOUR	NOMINAL SIZE INNER (WxH) mm	NOMINAL SIZE OUTER (WxH) mm	QTY
08862000	Black	25 x 37.5	29 x 41	4 x 1m
08872000	Black	25 x 50	29 x 54	4 x 1m
08882000	Black	50 x 50	54 x 54	4 x 1m
10452022	Grey	25 x 37.5	29 x 41	4 x 1m
10452023	Grey	25 x 50	29 x 54	4 x 1m
10452051	Grey	50 x 25	54 x 28	4 x 1m
10452053	Grey	50 x 50	54 x 54	4 x 1m

DESCRIPTION

Narrow slot PVC Betaduct provides a lightweight self extinguishing cable trunking with excellent rigidity and performance characteristics. Ideal for use with slimmer terminal blocks where more access is required. It improves appearance of panels with cables out in best position. Comes in 20 sizes with 10mm slot pitching. Recommended fixing method; Betaduct rivets and washers.

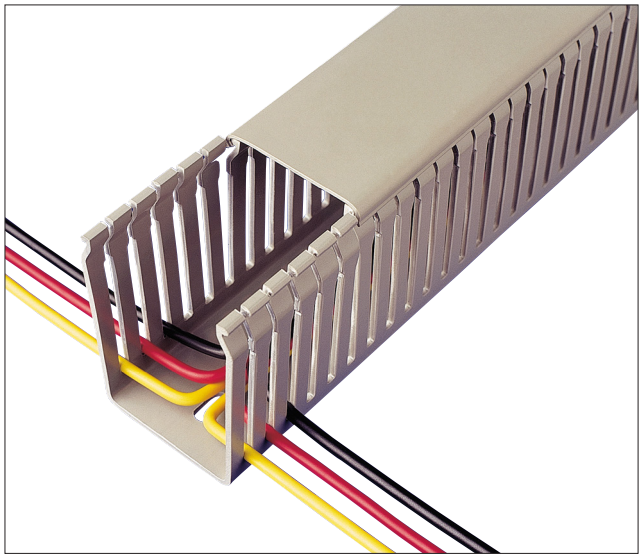

APPLICATION

Used with slimmer terminal blocks where more access is required, it improves appearance of panels with cables out in best position. For use when bundles, cables and wires need supporting in control panels, distribution boards and switchgear. Ideal for all panel building applications.

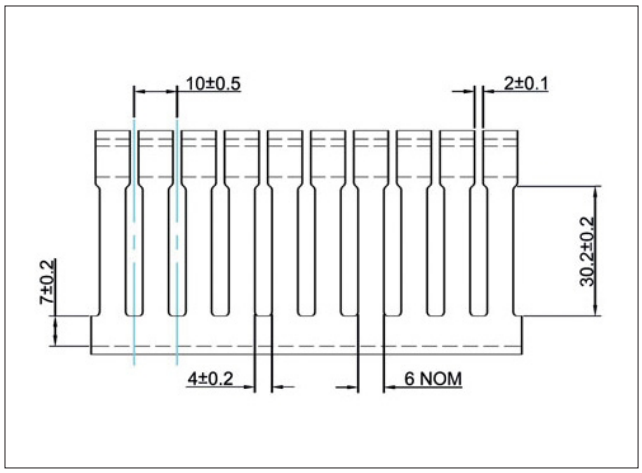

SPECIFICATION

Material:	Self-extinguishing PVC
Colour Options:	Grey (RAL 7030)
Service Temperature Range:	-15˚C to +60˚C
Flammability:	UL94 V-O Rated Material
Standards:	Base Slots to DIN 43659. RoHS, CSA, UL and Lloyds Register Approved.

PART NUMBERS & SIZES

PART NO. GREY NARROW SLOT	NOMINAL SIZE INNER (WxH) mm	NOMINAL SIZE OUTER (WxH) mm	PACK QTY (METRES)
10470018	19 x 50	25 x 53	24
10470022	25 x 37.5	29 x 41	24
10470023	25 x 50	29 x 54	24
10470024	25 x 75	29 x 79	16
10470025	25 x 100	30 x 105	16
10470032	37.5 x 37.5	41 x 41	24
10470033	37.5 x 50	41 x 54	16
10470034	37.5 x 75	41 x 79	16
10470035	37.5 x 100	43 x 105	16
10470052	50 x 37.5	56 x 41	16
10470053	50 x 50	54 x 54	16
10470054	50 x 75	55 x 79	16
10470055	50 x 100	56 x 105	8
10470072	75 x 37.5	80 x 41	16
10470073	75 x 50	78 x 54	16
10470074	75 x 75	80 x 80	16
10470075	75 x 100	80 x 105	8
10470103	100 x 50	107 x 54	8
10470104	100 x 75	107 x 80	8
10470105	100 x 100	107 x 104	8

DESCRIPTION

Narrow slot PVC Betaduct provides a lightweight self extinguishing cable trunking with excellent rigidity and performance characteristics. Ideal for use with slimmer terminal blocks where more access is required. It improves appearance of panels with cables out in best position. Comes in 20 sizes with 10mm slot pitching. Recommended fixing method; Betaduct rivets and washers.

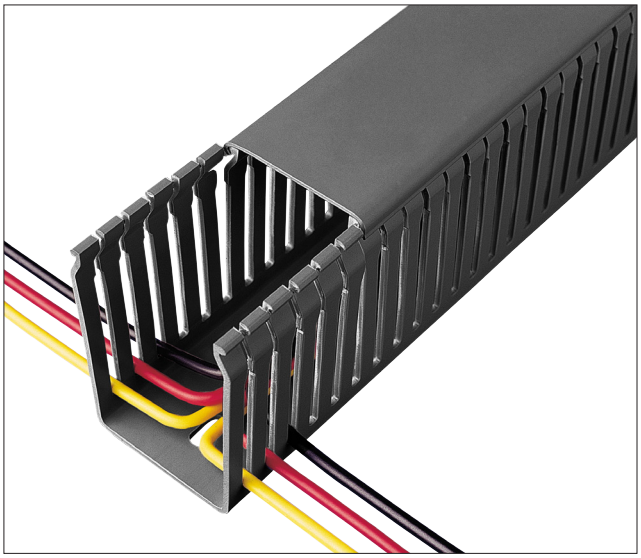

APPLICATION

Used with slimmer terminal blocks where more access is required, it improves appearance of panels with cables out in best position. For use when bundles, cables and wires need supporting in control panels, distribution boards and switchgear. Ideal for all panel building applications.

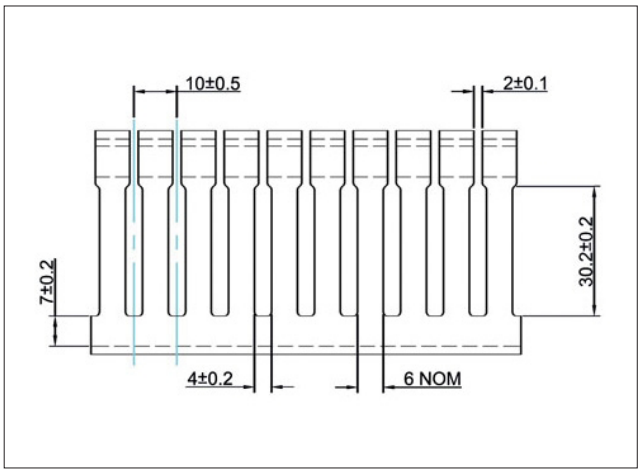

SPECIFICATION

Material: Self-extinguishing PVC

Colour Options: Black

Service Temperature Range: -15˚C to +60˚C

Flammability: UL94 V-O Rated Material

Standards: Base Slots to DIN 43659. RoHS, CSA, UL and Lloyds Register Approved.

PART NUMBERS & SIZES

PART NO. BLACK NARROW SLOT	NOMINAL SIZE INNER (WxH) mm	NOMINAL SIZE OUTER (WxH) mm	PACK QTY (METRES)
10490018	19 x 50	25 x 53	24
10490022	25 x 37.5	29 x 41	24
10490023	25 x 50	29 x 54	24
10490024	25 x 75	29 x 79	16
10490025	25 x 100	30 x 105	16
10490032	37.5 x 37.5	41 x 41	24
10490033	37.5 x 50	41 x 54	16
10490034	37.5 x 75	41 x 79	16
10490035	37.5 x 100	43 x 105	16
10490052	50 x 37.5	56 x 41	16
10490053	50 x 50	54 x 54	16
10490054	50 x 75	55 x 79	16
10490055	50 x 100	56 x 105	8
10490072	75 x 37.5	80 x 41	16
10490073	75 x 50	78 x 54	16
10490074	75 x 75	80 x 80	16
10490075	75 x 100	80 x 105	8
10490103	100 x 50	107 x 54	8
10490104	100 x 75	107 x 80	8
10490105	100 x 100	107 x 104	8

DESCRIPTION

Solid Wall PVC Betaduct provides a lightweight self-extinguishing cable trunking with excellent rigidity and performance characteristics. Solid wall design fully encloses cables providing maximum protection. Available in 25 sizes. Recommended fixing method; Betaduct rivets and washers.

APPLICATION

Ideal for use where little or no breakouts are required when bundles, cables and wires need supporting in control panels, distribution boards and switchgear. Ideal for all panel building applications.

SPECIFICATION

Material: Self-extinguishing PVC

Colour Options: Grey RAL 7030

Service Temperature Range: -15˚C to +60˚C

Flammability: UL94 V-O Rated Material

Standards: Base Slots to DIN 43659. RoHS, CSA, UL and Lloyds Register Approved.

PART NUMBERS & SIZES

PART NO. GREY SOLID WALL	NOMINAL SIZE INNER (WxH) mm	NOMINAL SIZE OUTER (WxH) mm	PACK QTY (METRES)
10480011	15 x 15	17 x 17	48
10480018	19 x 50	25 x 53	24
10480021	25 x 20	29 x 23	24
10480022	25 x 37.5	29 x 41	24
10480023	25 x 50	29 x 54	24
10480024	25 x 75	29 x 79	16
10480025	25 x 100	29 x 105	16
10480032	37.5 x 37.5	41 x 41	24
10480033	37.5 x 50	41 x 54	16
10480034	37.5 x 75	41 x 79	16
10480035	37.5 x 100	43 x 105	16
10480051	50 x 25	54 x 28	24
10480052	50 x 37.5	54 x 41	16
10480053	50 x 50	54 x 54	16
10480054	50 x 75	55 x 79	16
10480055	50 x 100	56 x 105	8
10480072	75 x 37.5	80 x 41	16
10480073	75 x 50	78 x 54	16
10480074	75 x 75	80 x 80	16
10480075	75 x 100	80 x 105	8
10480103	100 x 50	107 x 54	8
10480104	100 x 75	107 x 80	8
10480105	100 x 100	107 x 104	8
10480106	100 x 125	107 x 130	8
10480124	125 x 75	131 x 78	8

DESCRIPTION

Solid Wall PVC Betaduct provides a lightweight self-extinguishing cable trunking with excellent rigidity and performance characteristics. Solid wall design fully encloses cables providing maximum protection. Available in 25 sizes. Recommended fixing method; Betaduct rivets and washers.

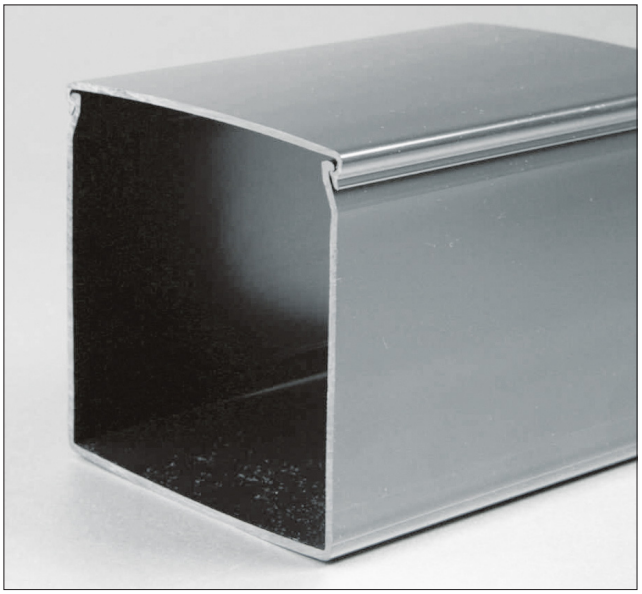

APPLICATION

Ideal for use where little or no breakouts are required when bundles, cables and wires need supporting in control panels, distribution boards and switchgear. Ideal for all panel building applications.

SPECIFICATION

Material: Self-extinguishing PVC

Colour Options: Black

Service Temperature Range: -15˚C to +60˚C

Flammability: UL94 V-O Rated Material

Standards: Base Slots to DIN 43659. RoHS, CSA, UL and Lloyds Register Approved.

PART NUMBERS & SIZES

PART NO. BLACK SOLID WALL	NOMINAL SIZE INNER (WxH) mm	NOMINAL SIZE OUTER (WxH) mm	PACK QTY (METRES)
0920	15 x 15	17 x 17	48
0921	25 x 20	29 x 23	24
0923	25 x 50	29 x 54	24
0924	25 x 75	29 x 79	16
0926	50 x 50	54 x 54	16
0927	50 x 75	55 x 79	16
0929	75 x 75	80 x 80	16
0942	125 x 75	131 x 78	8
1010	19 x 50	25 x 53	24
1011	25 x 37.5	29 x 41	24
1013	25 x 100	29 x 105	16
1014	37.5 x 37.5	41 x 41	24
1015	37.5 x 50	41 x 54	16
1016	37.5 x 75	41 x 79	16
1017	37.5 x 100	43 x 105	16
1018	50 x 25	54 x 28	24
1019	50 x 37.5	54 x 41	16
1022	50 x 100	56 x 105	8
1023	75 x 37.5	80 x 41	16
1024	75 x 50	78 x 54	16
1026	75 x 100	80 x 105	8
1028	100 x 50	107 x 54	8
1029	100 x 75	107 x 80	8
1030	100 x 100	107 x 104	8
1031	100 x 125	107 x 130	8